

4AM160S4-022-001

Use

Num. 3

B

A


Sign. & date

Num. 2

Num. 1

Sign. & date

Num.

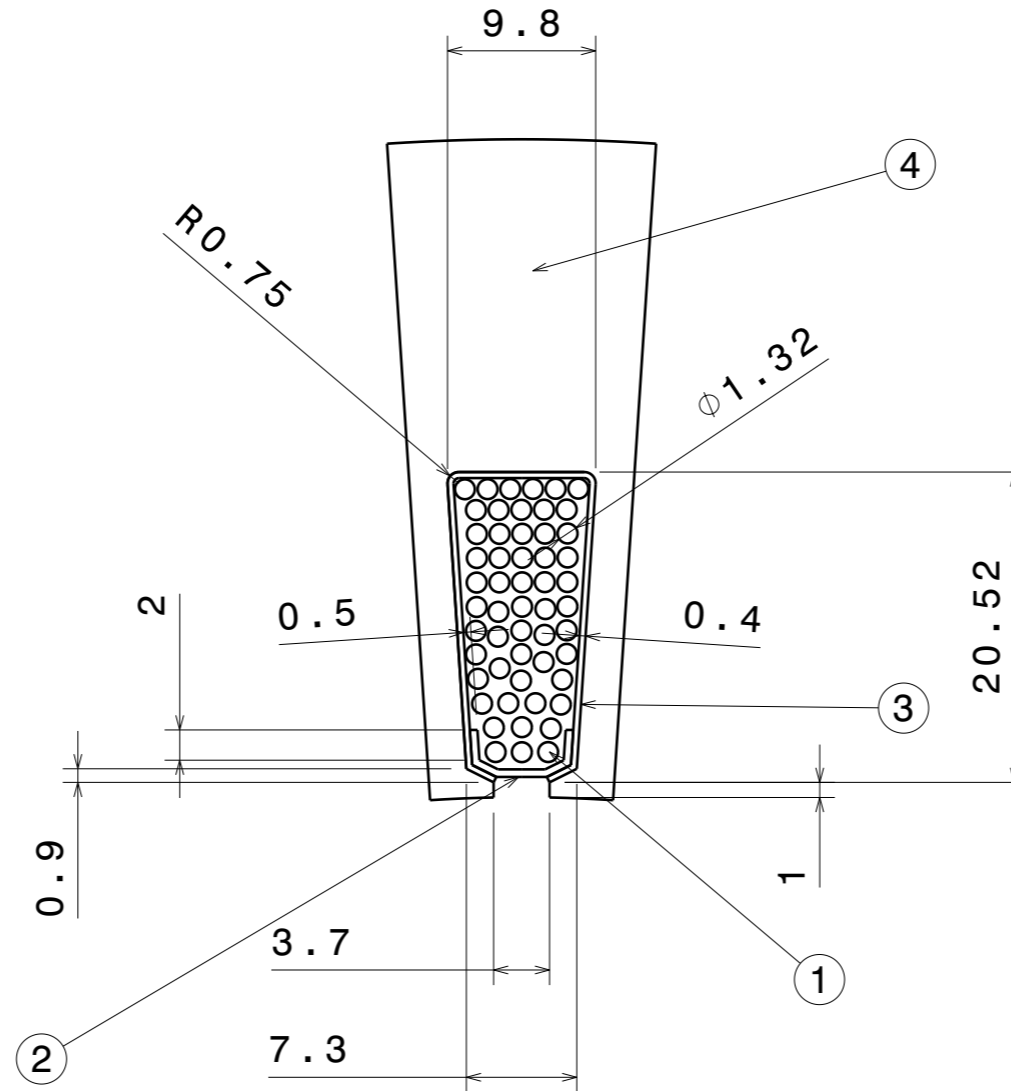

| Item | Qty | Unit | Part-No | Description | Remarks |
|------|-----|------|------------------|-------------------------|-----------------|
| 1 | 54 | pc | | Insulated copper wire | OD=1.32mm |
| 2 | 1 | pc | | Plastic wedge | Thickness=0.5mm |
| 3 | 1 | pc | | Plastic slot insulation | Thickness=0.4mm |
| 4 | 1 | pc | 4AM160S4-021-001 | Stator lamination | |

If not specified, tolerance of +/-0.1mm must be used.

Sharp edges must be removed.

This drawing cannot be reproduced or communicated without written agreement of Dr. A.Pulnikov.

| | | | | | | | | | |
|---------|-----|----------|-----------|------|--|--|---------|----------|------------|
| | | | | | 4AM160S4-022-001 | | | | |
| | | | | | Stator slot with wedge and insulation | | Let | Weight | Scale |
| | | | | | | | | - | 2:1 |
| Mod | Sh. | N. doc | Sign. | Date | Different materials | | Sheet 1 | Sheets 1 | |
| Design | | Müller | 4/12/2019 | | | | | | |
| Checked | | Schmidt | | | | | | | |
| Control | | | | | | | | | |
| Depart. | | | | | | | | | |
| Control | | | | | Pulnikov EC | | | | |
| Appr. | | Pulnikov | | | | | | | |